




RECYCLING
ENMA

EnMa CP 系列
22 30 40 55 75 110 150 185 22 300 370

气动输送机系统

 FROM ENMA
3R SOLUTIONS

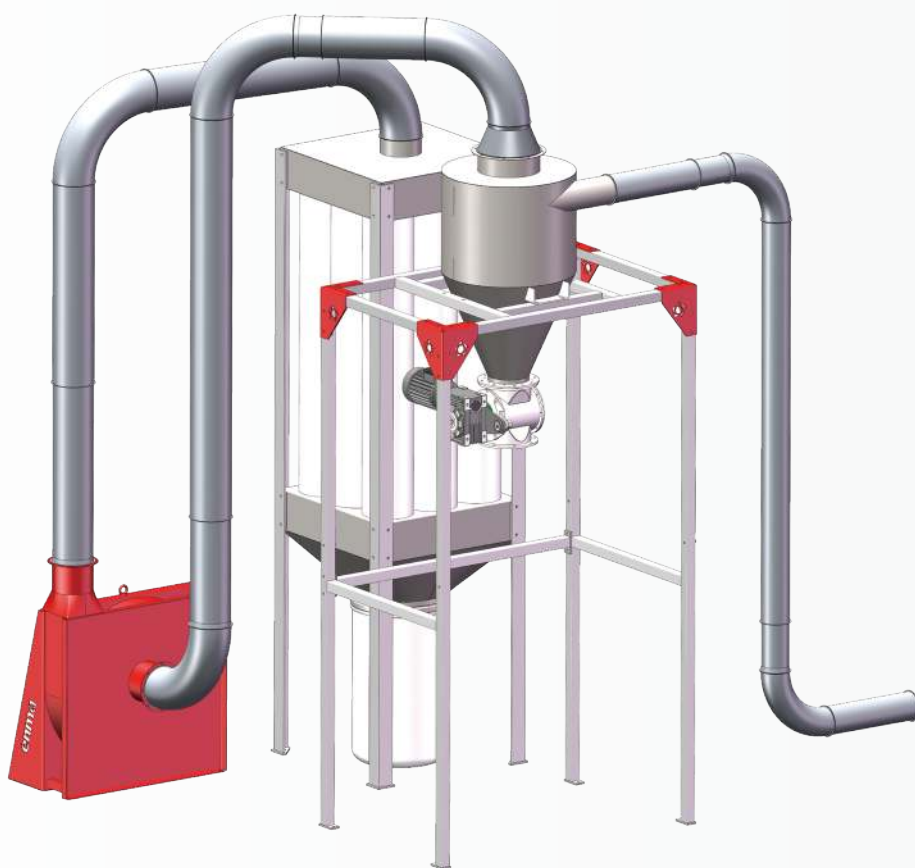

EnMa CP

22 30 40 55 75 110 150 185 220 300 370 系列

气动输送机

应用概述

EnMa CP系列气动输送机是用于输送散装和粉碎后的物料,可靠,使用成本低,效益高,例如:塑料颗粒,粉体,化工等。气动输送系统由鼓风机将压缩空气供应到输送系统,这种压缩将向压力较小的一侧(正压系统)行进,通过旋转阀或文丘里装置将固体材料送入气流中,在那里,固体颗粒被工作的空气输送到指定的位置。

设计特点

EnMa CP系列气体输送有三种不同的输送方式,正压吸送,正压吹送,负压输送。

正压吸送用于消费后粉碎回收领域,通过风机的叶片将粉碎后的物料先吸入到风机,然后吹到旋风分离器里,再通过旋风分离器的工作可以分离部分的粉尘。正压吹送用于工厂内的边角料粉碎回收,粉碎好的材料无需通过风机叶片输送,不污染材料。

负压输送用于在线粉碎回收和粉体的输送,通过合理的气压计算加装关风机,让您的使用现场更加安静,无粉尘。




EnMa CP-A 正压吸送装置

通过风机将粉碎后的物料先吸入到风机, 然后吹到旋风分离器里, 可以通过旋风分离器的工作可以分离部分的粉尘, 如果达不到除尘效果可以增加 ENMA 的除尘机 (Dust collector) 进一步除尘。





EnMa CP-B 正压吹送装置

通过风机将粉碎后的物料吹到指定的位置, 对于要求比较严格的物料不会通过风机的叶轮, 避免物料的污染和撞击。

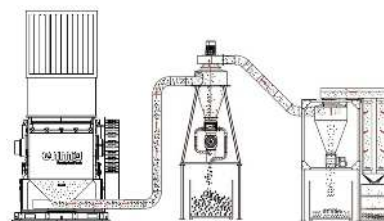

EnMa CP-C 负压输送装置

通过安装在旋风分离器上的强大风机, 将粉碎好的物料吸到旋风分离器里, 同时产生的负压可以用于除尘, 物料不会通过风机的叶轮避免物料的污染和撞击。



1.正压吹送装置
5.快速抱箍

2.负压输送装置
6.旋风分离器
400/650mm

3.正压吸送装置
7.除尘机

4.标准管道
8.高效风机

ENMA reserves the right of final instruction and modification for all the content. All the products pictures, appearance, technical parameters and function description shall refer to the physical objects. If there is any configuration and parameter adjustment due to technical updates, you will not be notified additionally.



ENMA Granulator(China)Co.,Ltd.

No.121.5888#,Baoqian Road, Jiading District,Shanghai,China.

Tel:+86 21 69932999

Fax:+86 21 59589222

Email:info@enma.fr

Web:www.enma.fr